

Reinforced Video Captioning with Entailment Rewards

Ramakanth Pasunuru and Mohit Bansal

UNC Chapel Hill

{ram, mbansal}@cs.unc.edu

Abstract

Sequence-to-sequence models have shown promising improvements on the temporal task of video captioning, but they optimize word-level cross-entropy loss during training. First, using policy gradient and mixed-loss methods for reinforcement learning, we directly optimize sentence-level task-based metrics (as rewards), achieving significant improvements over the baseline, based on both automatic metrics and human evaluation on multiple datasets. Next, we propose a novel entailment-enhanced reward (CIDEnt) that corrects phrase-matching based metrics (such as CIDEr) to only allow for logically-implied partial matches and avoid contradictions, achieving further significant improvements over the CIDEr-reward model. Overall, our CIDEnt-reward model achieves the new state-of-the-art on the MSR-VTT dataset.

1 Introduction

The task of video captioning (Fig. 1) is an important next step to image captioning, with additional modeling of temporal knowledge and action sequences, and has several applications in online content search, assisting the visually-impaired, etc. Advancements in neural sequence-to-sequence learning has shown promising improvements on this task, based on encoder-decoder, attention, and hierarchical models (Venugopalan et al., 2015a; Pan et al., 2016a). However, these models are still trained using a word-level cross-entropy loss, which does not correlate well with the sentence-level metrics that the task is finally evaluated on (e.g., CIDEr, BLEU). Moreover, these models suffer from exposure bias (Ran-



Ground truth: A band is performing a song.

A rock concert performance by a band.

Baseline-XE: A person is playing a video game.

CIDEr-RL: A band is playing a video game.

CIDEnt-RL: A band is performing a song.

Figure 1: A correctly-predicted video caption generated by our CIDEnt-reward model.

zato et al., 2016), which occurs when a model is only exposed to the training data distribution, instead of its own predictions. First, using a sequence-level training, policy gradient approach (Ranzato et al., 2016), we allow video captioning models to directly optimize these non-differentiable metrics, as rewards in a reinforcement learning paradigm. We also address the exposure bias issue by using a mixed-loss (Paulus et al., 2017; Wu et al., 2016), i.e., combining the cross-entropy and reward-based losses, which also helps maintain output fluency.

Next, we introduce a novel entailment-corrected reward that checks for logically-directed partial matches. Current reinforcement-based text generation works use traditional phrase-matching metrics (e.g., CIDEr, BLEU) as their reward function. However, these metrics use *undirected* n -gram matching of the machine-generated caption with the ground-truth caption, and hence fail to capture its *directed logical correctness*. Therefore, they still give high scores to even those generated captions that contain a single but critical wrong word (e.g., negation, unrelated action or object), because all the other words still match with the ground truth. We introduce CIDEnt, which penalizes the phrase-matching metric (CIDEr) based reward, when the entailment score is low. This ensures that a generated caption gets a high re-

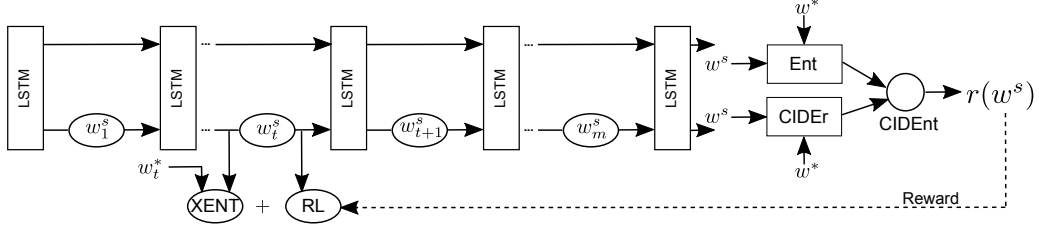


Figure 2: Reinforced (mixed-loss) video captioning using entailment-corrected CIDEr score as reward.

ward only when it is a directed match with (i.e., it is logically implied by) the ground truth caption, hence avoiding contradictory or unrelated information (e.g., see Fig. 1). Empirically, we show that first the CIDEr-reward model achieves significant improvements over the cross-entropy baseline (on multiple datasets, and automatic and human evaluation); next, the CIDEnt-reward model further achieves significant improvements over the CIDEr-based reward. Overall, we achieve the new state-of-the-art on the MSR-VTT dataset.

2 Related Work

Past work has presented several sequence-to-sequence models for video captioning, using attention, hierarchical RNNs, 3D-CNN video features, joint embedding spaces, language fusion, etc., but using word-level cross entropy loss training (Venugopalan et al., 2015a; Yao et al., 2015; Pan et al., 2016a,b; Venugopalan et al., 2016).

Policy gradient for image captioning was recently presented by Ranzato et al. (2016), using a mixed sequence level training paradigm to use non-differentiable evaluation metrics as rewards.¹ Liu et al. (2016b) and Rennie et al. (2016) improve upon this using Monte Carlo roll-outs and a test inference baseline, respectively. Paulus et al. (2017) presented summarization results with ROUGE rewards, in a mixed-loss setup.

Recognizing Textual Entailment (RTE) is a traditional NLP task (Dagan et al., 2006; Lai and Hockenmaier, 2014; Jimenez et al., 2014), boosted by a large dataset (SNLI) recently introduced by Bowman et al. (2015). There have been several leaderboard models on SNLI (Cheng et al., 2016; Rocktäschel et al., 2016); we focus on the decomposable, intra-sentence attention model of Parikh et al. (2016). Recently, Pasunuru and Bansal (2017) used multi-task learning to combine video captioning with entailment and video generation.

¹Several papers have presented the relative comparison of image captioning metrics, and their pros and cons (Vedantam et al., 2015; Anderson et al., 2016; Liu et al., 2016b; Hodosh et al., 2013; Elliott and Keller, 2014).

3 Models

Attention Baseline (Cross-Entropy) Our attention-based seq-to-seq baseline model is similar to the Bahdanau et al. (2015) architecture, where we encode input frame level video features $\{f_{1:n}\}$ via a bi-directional LSTM-RNN and then generate the caption $w_{1:m}$ using an LSTM-RNN with an attention mechanism. Let θ be the model parameters and $w_{1:m}^*$ be the ground-truth caption, then the cross entropy loss function is:

$$L(\theta) = - \sum_{t=1}^m \log p(w_t^* | w_{1:t-1}^*, f_{1:n}) \quad (1)$$

where $p(w_t | w_{1:t-1}, f_{1:n}) = \text{softmax}(W^T h_t^d)$, W^T is the projection matrix, and w_t and h_t^d are the generated word and the RNN decoder hidden state at time step t , computed using the standard RNN recursion and attention-based context vector c_t . Details of the attention model are in the supplementary (due to space constraints).

Reinforcement Learning (Policy Gradient) In order to directly optimize the sentence-level test metrics (as opposed to the cross-entropy loss above), we use a policy gradient p_θ , where θ represent the model parameters. Here, our baseline model acts as an agent and interacts with its environment (video and caption). At each time step, the agent generates a word (action), and the generation of the end-of-sequence token results in a reward r to the agent. Our training objective is to minimize the negative expected reward function:

$$L(\theta) = -\mathbb{E}_{w^s \sim p_\theta} [r(w^s)] \quad (2)$$

where w^s is the word sequence sampled from the model. Based on the REINFORCE algorithm (Williams, 1992), the gradients of this non-differentiable, reward-based loss function are:

$$\nabla_\theta L(\theta) = -\mathbb{E}_{w^s \sim p_\theta} [r(w^s) \cdot \nabla_\theta \log p_\theta(w^s)] \quad (3)$$

We follow Ranzato et al. (2016) approximating the above gradients via a single sampled word

Ground-truth caption	Generated (sampled) caption	CIDEr	Ent
a man is spreading some butter in a pan	puppies is melting butter on the pan	140.5	0.07
a panda is eating some bamboo	a panda is eating some fried	256.8	0.14
a monkey pulls a dogs tail	a monkey pulls a woman	116.4	0.04
a man is cutting the meat	a man is cutting meat into potato	114.3	0.08
the dog is jumping in the snow	a dog is jumping in cucumbers	126.2	0.03
a man and a woman is swimming in the pool	a man and a whale are swimming in a pool	192.5	0.02

Table 1: Examples of captions sampled during policy gradient and their CIDEr vs Entailment scores.

sequence. We also use a variance-reducing bias (baseline) estimator in the reward function. Their details and the partial derivatives using the chain rule are described in the supplementary.

Mixed Loss During reinforcement learning, optimizing for only the reinforcement loss (with automatic metrics as rewards) doesn’t ensure the readability and fluency of the generated caption, and there is also a chance of gaming the metrics without actually improving the quality of the output (Liu et al., 2016a). Hence, for training our reinforcement based policy gradients, we use a mixed loss function, which is a weighted combination of the cross-entropy loss (XE) and the reinforcement learning loss (RL), similar to the previous work (Paulus et al., 2017; Wu et al., 2016). This mixed loss improves results on the metric used as reward through the reinforcement loss (and improves relevance based on our entailment-enhanced rewards) but also ensures better readability and fluency due to the cross-entropy loss (in which the training objective is a conditioned language model, learning to produce fluent captions). Our mixed loss is defined as:

$$L_{\text{MIXED}} = (1 - \gamma)L_{\text{XE}} + \gamma L_{\text{RL}} \quad (4)$$

where γ is a tuning parameter used to balance the two losses. For annealing and faster convergence, we start with the optimized cross-entropy loss baseline model, and then move to optimizing the above mixed loss function.²

4 Reward Functions

Caption Metric Reward Previous image captioning papers have used traditional captioning metrics such as CIDEr, BLEU, or METEOR as reward functions, based on the match between the generated caption sample and the ground-truth reference(s). First, it has been shown by Vedantam

et al. (2015) that CIDEr, based on a consensus measure across several human reference captions, has a higher correlation with human evaluation than other metrics such as METEOR, ROUGE, and BLEU. They further showed that CIDEr gets better with more number of human references (and this is a good fit for our video captioning datasets, which have 20-40 human references per video).

More recently, Rennie et al. (2016) further showed that CIDEr as a reward in image captioning outperforms all other metrics as a reward, not just in terms of improvements on CIDEr metric, but also on all other metrics. In line with these above previous works, we also found that CIDEr as a reward (‘CIDEr-RL’ model) achieves the best metric improvements in our video captioning task, and also has the best human evaluation improvements (see Sec. 6.3 for result details, incl. those about other rewards based on BLEU, SPICE).

Entailment Corrected Reward Although CIDEr performs better than other metrics as a reward, all these metrics (including CIDEr) are still based on an undirected n -gram matching score between the generated and ground truth captions. For example, the wrong caption “a man is playing football” w.r.t. the correct caption “a man is playing basketball” still gets a high score, even though these two captions belong to two completely different events. Similar issues hold in case of a negation or a wrong action/object in the generated caption (see examples in Table 1).

We address the above issue by using an entailment score to correct the phrase-matching metric (CIDEr or others) when used as a reward, ensuring that the generated caption is logically implied by (i.e., is a paraphrase or directed partial match with) the ground-truth caption. To achieve an accurate entailment score, we adapt the state-of-the-art decomposable-attention model of Parikh et al. (2016) trained on the SNLI corpus (image caption domain). This model gives us a probability for whether the sampled video caption (generated by our model) is entailed by the ground truth caption as premise (as opposed to a contradiction or neu-

²We also experimented with the curriculum learning ‘MIXER’ strategy of Ranzato et al. (2016), where the XE+RL annealing is based on the decoder time-steps; however, the mixed loss function strategy (described above) performed better in terms of maintaining output caption fluency.

tral case).³ Similar to the traditional metrics, the overall ‘Ent’ score is the maximum over the entailment scores for a generated caption w.r.t. each reference human caption (around 20/40 per MSR-VTT/YouTube2Text video). CIDEnt is defined as:

$$\text{CIDEnt} = \begin{cases} \text{CIDEr} - \lambda, & \text{if Ent} < \beta \\ \text{CIDEr}, & \text{otherwise} \end{cases} \quad (5)$$

which means that if the entailment score is very low, we penalize the metric reward score by decreasing it by a penalty λ . This agreement-based formulation ensures that we only trust the CIDEr-based reward in cases when the entailment score is also high. Using $\text{CIDEr} - \lambda$ also ensures the smoothness of the reward w.r.t. the original CIDEr function (as opposed to clipping the reward to a constant). Here, λ and β are hyperparameters that can be tuned on the dev-set; on light tuning, we found the best values to be intuitive: $\lambda =$ roughly the baseline (cross-entropy) model’s score on that metric (e.g., 0.45 for CIDEr on MSR-VTT dataset); and $\beta = 0.33$ (i.e., the 3-class entailment classifier chose contradiction or neutral label for this pair). Table 1 shows some examples of sampled generated captions during our model training, where CIDEr was misleadingly high for incorrect captions, but the low entailment score (probability) helps us successfully identify these cases and penalize the reward.

5 Experimental Setup

Datasets We use 2 datasets: MSR-VTT (Xu et al., 2016) has 10,000 videos, 20 references/video; and YouTube2Text/MSVD (Chen and Dolan, 2011) has 1970 videos, 40 references/video. Standard splits and other details in supp.

Automatic Evaluation We use several standard automated evaluation metrics: METEOR, BLEU-4, CIDEr-D, and ROUGE-L (from MS-COCO evaluation server (Chen et al., 2015)).

Human Evaluation We also present human evaluation for comparison of baseline-XE, CIDEr-RL, and CIDEnt-RL models, esp. because the automatic metrics cannot be trusted solely. Relevance measures how related is the generated caption w.r.t. to the video content, whereas coherence measures readability of the generated caption.

³Our entailment classifier based on Parikh et al. (2016) is 92% accurate on entailment in the caption domain, hence serving as a highly accurate reward score. For other domains in future tasks such as new summarization, we plan to use the new multi-domain dataset by Williams et al. (2017).

Training Details All the hyperparameters are tuned on the validation set. All our results (including baseline) are based on a 5-avg-ensemble. See supplementary for extra training details, e.g., about the optimizer, learning rate, RNN size, Mixed-loss, and CIDEnt hyperparameters.

6 Results

6.1 Primary Results

Table 2 shows our primary results on the popular MSR-VTT dataset. First, our baseline attention model trained on cross entropy loss (‘Baseline-XE’) achieves strong results w.r.t. the previous state-of-the-art methods.⁴ Next, our policy gradient based mixed-loss RL model with reward as CIDEr (‘CIDEr-RL’) improves significantly⁵ over the baseline on all metrics, and not just the CIDEr metric. It also achieves statistically significant improvements in terms of human relevance evaluation (see below). Finally, the last row in Table 2 shows results for our novel CIDEnt-reward RL model (‘CIDEnt-RL’). This model achieves statistically significant⁶ improvements on top of the strong CIDEr-RL model, on all automatic metrics (as well as human evaluation). Note that in Table 2, we also report the CIDEnt reward scores, and the CIDEnt-RL model strongly outperforms CIDEr and baseline models on this entailment-corrected measure. Overall, we are also the new Rank1 on the MSR-VTT leaderboard, based on their ranking criteria.

Human Evaluation We also perform small human evaluation studies (250 samples from the MSR-VTT test set output) to compare our 3 models pairwise.⁷ As shown in Table 3 and Table 4, in terms of relevance, first our CIDEr-RL model stat. significantly outperforms the baseline XE model ($p < 0.02$); next, our CIDEnt-RL model significantly outperforms the CIDEr-RL model ($p <$

⁴We list previous works’ results as reported by the MSR-VTT dataset paper itself, as well as their 3 leaderboard winners (<http://ms-multimedia-challenge.com/leaderboard>), plus the 10-ensemble video+entailment generation multi-task model of Pasunuru and Bansal (2017).

⁵Statistical significance of $p < 0.01$ for CIDEr, METEOR, and ROUGE, and $p < 0.05$ for BLEU, based on the bootstrap test (Noreen, 1989; Efron and Tibshirani, 1994).

⁶Statistical significance of $p < 0.01$ for CIDEr, BLEU, ROUGE, and CIDEnt, and $p < 0.05$ for METEOR.

⁷We randomly shuffle pairs to anonymize model identity and the human evaluator then chooses the better caption based on relevance and coherence (see Sec. 5). ‘Not Distinguishable’ are cases where the annotator found both captions to be equally good or equally bad).

Models	BLEU-4	METEOR	ROUGE-L	CIDEr-D	CIDEnt	Human*
PREVIOUS WORK						
Venugopalan (2015b)*	32.3	23.4	-	-	-	-
Yao et al. (2015)*	35.2	25.2	-	-	-	-
Xu et al. (2016)	36.6	25.9	-	-	-	-
Pasunuru and Bansal (2017)	40.8	28.8	60.2	47.1	-	-
Rank1: v2t_navigator	40.8	28.2	60.9	44.8	-	-
Rank2: Aalto	39.8	26.9	59.8	45.7	-	-
Rank3: VideoLAB	39.1	27.7	60.6	44.1	-	-
OUR MODELS						
Cross-Entropy (Baseline-XE)	38.6	27.7	59.5	44.6	34.4	-
CIDEr-RL	39.1	28.2	60.9	51.0	37.4	11.6
CIDEnt-RL (New Rank1)	40.5	28.4	61.4	51.7	44.0	18.4

Table 2: Our primary video captioning results on MSR-VTT. All CIDEr-RL results are statistically significant over the baseline XE results, and all CIDEnt-RL results are stat. signif. over the CIDEr-RL results. Human* refers to the ‘pairwise’ comparison of human relevance evaluation between CIDEr-RL and CIDEnt-RL models (see full human evaluations of the 3 models in Table 3 and Table 4).

	Relevance	Coherence
Not Distinguishable	64.8%	92.8%
Baseline-XE Wins	13.6%	4.0%
CIDEr-RL Wins	21.6%	3.2%

Table 3: Human eval: Baseline-XE vs CIDEr-RL.

	Relevance	Coherence
Not Distinguishable	70.0%	94.6%
CIDEr-RL Wins	11.6%	2.8%
CIDEnt-RL Wins	18.4%	2.8%

Table 4: Human eval: CIDEr-RL vs CIDEnt-RL.

0.03). The models are statistically equal on coherence in both comparisons.

6.2 Other Datasets

We also tried our CIDEr and CIDEnt reward models on the YouTube2Text dataset. In Table 5, we first see strong improvements from our CIDEr-RL model on top of the cross-entropy baseline. Next, the CIDEnt-RL model also shows some improvements over the CIDEr-RL model, e.g., on BLEU and the new entailment-corrected CIDEnt score. It also achieves significant improvements on human relevance evaluation (250 samples).⁸

6.3 Other Metrics as Reward

As discussed in Sec. 4, CIDEr is the most promising metric to use as a reward for captioning, based on both previous work’s findings as well as ours. We did investigate the use of other metrics as the reward. When using BLEU as a reward (on MSR-VTT), we found that this BLEU-RL model achieves BLEU-metric improvements, but was worse than the cross-entropy baseline on human evaluation. Similarly, a BLEUEnt-RL model achieves BLEU and BLEUEnt metric improvements, but is again worse on human evaluation.

⁸This dataset has a very small dev-set, causing tuning issues – we plan to use a better train/dev re-split in future work.

Models	B	M	R	C	CE	H*
Baseline-XE	52.4	35.0	71.6	83.9	68.1	-
CIDEr-RL	53.3	35.1	72.2	89.4	69.4	8.4
CIDEnt-RL	54.4	34.9	72.2	88.6	71.6	13.6

Table 5: Results on YouTube2Text (MSVD) dataset. CE = CIDEnt score. H* refer to the pairwise human comparison of relevance.

We also experimented with the new SPICE metric (Anderson et al., 2016) as a reward, but this produced long repetitive phrases (as also discussed in Liu et al. (2016b)).

6.4 Analysis

Fig. 1 shows an example where our CIDEnt-reward model correctly generates a ground-truth style caption, whereas the CIDEr-reward model produces a non-entailed caption because this caption will still get a high phrase-matching score. Several more such examples are in the supp.

7 Conclusion

We first presented a mixed-loss policy gradient approach for video captioning, allowing for metric-based optimization. We next presented an entailment-corrected CIDEnt reward that further improves results, achieving the new state-of-the-art on MSR-VTT. In future work, we are applying our entailment-corrected rewards to other directed generation tasks such as image captioning and document summarization (using the new multi-domain NLI corpus (Williams et al., 2017)).

Acknowledgments

We thank the anonymous reviewers for their helpful comments. This work was supported by a Google Faculty Research Award, an IBM Faculty Award, a Bloomberg Data Science Research Grant, and NVidia GPU awards.

Supplementary Material

A Attention-based Baseline Model (Cross-Entropy)

Our attention baseline model is similar to the Bahdanau et al. (2015) architecture, where we encode input frame level video features to a bi-directional LSTM-RNN and then generate the caption using a single layer LSTM-RNN, with an attention mechanism. Let $\{f_1, f_2, \dots, f_n\}$ be the frame-level features of a video clip and $\{w_1, w_2, \dots, w_m\}$ be the sequence of words forming a caption. The distribution of words at time step t given the previously generated words and input video frame-level features is given as follows:

$$p(w_t | w_{1:t-1}, f_{1:n}) = \text{softmax}(W^T h_t^d) \quad (6)$$

where w_t and h_t^d are the generated word and hidden state of the LSTM decoder at time step t . W^T is the projection matrix. h_t^d is given as follows:

$$h_t^d = S(h_{t-1}^d, w_{t-1}, c_t) \quad (7)$$

where S is a non-linear function. h_{t-1}^d and w_{t-1} are previous time step's hidden state and generated word. c_t is a context vector which is a linear weighted combination of the encoder hidden states h_i^e , given by $c_t = \sum \alpha_{t,i} h_i^e$. These weights $\alpha_{t,i}$ act as an attention mechanism, and are defined as follows:

$$\alpha_{t,i} = \frac{\exp(e_{t,i})}{\sum_{k=1}^n \exp(e_{t,k})} \quad (8)$$

where the attention function $e_{t,i}$ is defined as:

$$e_{t,i} = w^T \tanh(W_a h_i^e + U_a h_{t-1}^d + b_a) \quad (9)$$

where w , W_a , U_a , and b_a are trained attention parameters. Let θ be the model parameters and $\{w_1^*, w_2^*, \dots, w_m^*\}$ be the ground-truth word sequence, then the cross entropy loss optimization function is defined as follows:

$$L(\theta) = - \sum_{i=1}^m \log(p(w_i^* | w_{1:t-1}^*, f_{1:n})) \quad (10)$$

B Reinforcement Learning (Policy Gradient)

Traditional video captioning systems minimize the cross entropy loss during training, but typically evaluated using phrase-matching metrics: BLEU, METEOR, CIDEr, and ROUGE-L. This discrepancy can be addressed by directly optimizing the

non-differentiable metric scores using policy gradients p_θ , where θ represents the model parameters. In our captioning system, our baseline attention model acts as an agent and interacts with its environment (video and caption). At each time step, the agent generates a word (action), and the generation of the end-of-sequence token results in a reward r to the agent. Our training objective is to minimize the negative expected reward function given by:

$$L(\theta) = -\mathbb{E}_{w^s \sim p_\theta}[r(w^s)] \quad (11)$$

where $w^s = \{w_1^s, w_2^s, \dots, w_m^s\}$, and w_t^s is the word sampled from the model at time step t . Based on the REINFORCE algorithm (Williams, 1992), the gradients of the non-differentiable, reward-based loss function can be computed as follows:

$$\nabla_\theta L(\theta) = -\mathbb{E}_{w^s \sim p_\theta}[r(w^s) \nabla_\theta \log p_\theta(w^s)] \quad (12)$$

The above gradients can be approximated from a single sampled word sequence w^s from p_θ as follows:

$$\nabla_\theta L(\theta) \approx -r(w^s) \nabla_\theta \log p_\theta(w^s) \quad (13)$$

However, the above approximation has high variance because of estimating the gradient with a single sample. Adding a baseline estimator reduces this variance (Williams, 1992) without changing the expected gradient. Hence, Eqn: 13 can be rewritten as follows:

$$\nabla_\theta L(\theta) \approx -(r(w^s) - b_t) \nabla_\theta \log p_\theta(w^s) \quad (14)$$

where b_t is the baseline estimator, where b_t can be a function of θ or time step t , but not a function of w^s . In our model, baseline estimator is a simple linear regressor with hidden state of the decoder h_t^d at time step t as the input. We stop the back propagation of gradients before the hidden states for the baseline bias estimator. Using the chain rule, loss function can be written as:

$$\nabla_\theta L(\theta) = \sum_{t=1}^m \frac{\partial L}{\partial s_t} \frac{\partial s_t}{\partial \theta} \quad (15)$$

where s_t is the input to the *softmax* layer, where $s_t = W^T h_t^d$. $\frac{\partial L}{\partial s_t}$ is given by (Zaremba and Sutskever, 2015) as follows:

$$\frac{\partial L}{\partial s_t} \approx (r(w^s) - b_t)(p_\theta(w_t | h_t^d) - 1_{w_t^s}) \quad (16)$$

The overall intuition behind this gradient formulation is: if the reward $r(w^s)$ for the sampled word sequence w^s is greater than the baseline estimator b_t , the gradient of the loss function becomes negative, then model encourages the sampled distribution by increasing their word probabilities, otherwise the model discourages the sampled distribution by decreasing their word probabilities.

C Experimental Setup

C.1 MSR-VTT Dataset

MSR-VTT is a diverse collection of 10,000 video clips (41.2 hours of duration) from a commercial video search engine. Each video has 20 human annotated reference captions collected through Amazon Mechanical Turk (AMT). We use the standard split as provided in (Xu et al., 2016), i.e., 6513 for training, 497 for testing, and remaining for testing. For each video, we sample at $3fps$ and we extract Inception-v4 (Szegedy et al., 2016) features from these sampled frames and we also remove all the punctuations from the text data.

C.2 YouTube2Text Dataset

We also evaluate our models on YouTube2Text dataset (Chen and Dolan, 2011). This dataset has 1970 video clips and each clip is annotated with an average of 40 captions by humans. We use the standard split as given in (Venugopalan et al., 2015a), i.e., 1200 clips for training, 100 for validation and 670 for testing. We do similar preprocessing as the MSR-VTT dataset.

C.3 Automatic Evaluation Metrics

We use several standard automated evaluation metrics: METEOR (Denkowski and Lavie, 2014), BLEU-4 (Papineni et al., 2002), CIDEr-D (Vedantam et al., 2015), and ROUGE-L (Lin, 2004). We use the standard Microsoft-COCO evaluation server (Chen et al., 2015).

C.4 Human Evaluation

Apart from the automatic metrics, we also present human evaluation comparing the CIDEr-reward model with the CIDEr-reward model, esp. because the automatic metrics cannot be trusted solely. Human evaluation uses *Relevance* and *Coherence* as the comparison metrics. Relevance is about how related is the generated caption w.r.t. the content

of the video, whereas coherence is about the logic, fluency, and readability of the generated caption.

D Training Details

All the hyperparameters are tuned on the validation set. For each of our main models (baseline, CIDEr and CIDEr-RL), we report the results on a 5-avg-ensemble, where we run the model 5 times with different initialization random seeds and take the average probabilities at each time step of the decoder during inference time. We use a fixed size step LSTM-RNN encoder-decoder, with encoder step size of 50 and decoder step size of 16. Each LSTM has a hidden size of 1024. We use Inception-v4 features as video frame-level features. We use word embedding size of 512. Also, we project down the 1536-dim image features (Inception-v4) to 512-dim.

We apply dropout to vertical connections as proposed in Zaremba et al. (2014), with a value 0.5 and a gradient clip size of 10. We use Adam optimizer (Kingma and Ba, 2015) with a learning rate of 0.0001 for baseline cross-entropy loss. All the trainable weights are initialized with a uniform distribution in the range $[-0.08, 0.08]$. During the test time inference, we use beam search of size 5. All our reward-based models use mixed loss optimization (Paulus et al., 2017; Wu et al., 2016), where we train the model based on weighted (γ) combination of cross-entropy loss and reinforcement loss. For MSR-VTT dataset, we use $\gamma = 0.9995$ for our CIDEr-RL model and $\gamma = 0.9990$ for our CIDEr-RL model. For YouTube2Text/MSVD dataset, we use $\gamma = 0.9985$ for our CIDEr-RL model and $\gamma = 0.9990$ and for our CIDEr-RL model. The learning rate for the mixed-loss optimization is 1×10^{-5} for MSR-VTT, and 1×10^{-6} for YouTube2Text/MSVD. The λ hyperparameter in our CIDEr reward formulation (see Sec. 4 in main paper) is roughly equal to the baseline cross-entropy model’s score on that metric, i.e., $\lambda = 0.45$ for MSR-VTT CIDEr-RL model and $\lambda = 0.75$ for YouTube2Text/MSVD CIDEr-RL model.

E Analysis

Figure 3 shows several examples where our CIDEr-reward model produces better entailed captions than the ones generated by the CIDEr-reward model. This is because the CIDEr-style



Ground truth: A man is playing a violin.
A man is playing the violin on stage.

Baseline-XE: A man is playing the drums.

CIDEr-RL: A man is playing a guitar.

CIDEnt-RL: A man is playing a violin.



Ground truth: Two men are wrestling.
Two guys are wrestling in a competition.

Baseline-XE: A group of people are playing a game.

CIDEr-RL: A man is playing a wrestling.

CIDEnt-RL: Two men are wrestling.



Ground truth: A person is playing a video game.
Someone is playing video game.

Baseline-XE: A man is riding a motorcycle.

CIDEr-RL: A man is talking about a plane.

CIDEnt-RL: A person is playing a video game.

Figure 3: Output examples where our CIDEnt-RL model produces better entailed captions than the phrase-matching CIDEr-RL model, which in turn is better than the baseline cross-entropy model.

captioning metrics achieve a high score even when the generation does not exactly entail the ground truth but is just a high phrase overlap. This can obviously cause issues by inserting a single wrong word such as a negation, contradiction, or wrong action/object. On the other hand, our entailment-enhanced CIDEnt score is only high when both CIDEr and the entailment classifier achieve high scores. The CIDEr-RL model, in turn, produces better captions than the baseline cross-entropy model, which is not aware of sentence-level matching at all.

References

- Peter Anderson, Basura Fernando, Mark Johnson, and Stephen Gould. 2016. SPICE: Semantic propositional image caption evaluation. In *ECCV*, pages 382–398.
- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. 2015. Neural machine translation by jointly learning to align and translate. In *ICLR*.
- Samuel R Bowman, Gabor Angeli, Christopher Potts, and Christopher D Manning. 2015. A large annotated corpus for learning natural language inference. In *EMNLP*.
- David L Chen and William B Dolan. 2011. Collecting highly parallel data for paraphrase evaluation. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1*, pages 190–200. Association for Computational Linguistics.
- Xinlei Chen, Hao Fang, Tsung-Yi Lin, Ramakrishna Vedantam, Saurabh Gupta, Piotr Dollár, and C Lawrence Zitnick. 2015. Microsoft COCO captions: Data collection and evaluation server. *arXiv preprint arXiv:1504.00325*.
- Jianpeng Cheng, Li Dong, and Mirella Lapata. 2016. Long short-term memory-networks for machine reading. In *EMNLP*.
- Ido Dagan, Oren Glickman, and Bernardo Magnini. 2006. The PASCAL recognising textual entailment challenge. In *Machine learning challenges. evaluating predictive uncertainty, visual object classification, and recognising textual entailment*, pages 177–190. Springer.
- Michael Denkowski and Alon Lavie. 2014. Meteor universal: Language specific translation evaluation for any target language. In *EACL*.
- Bradley Efron and Robert J Tibshirani. 1994. *An introduction to the bootstrap*. CRC press.
- Desmond Elliott and Frank Keller. 2014. Comparing automatic evaluation measures for image description. In *ACL*, pages 452–457.
- Micah Hodosh, Peter Young, and Julia Hockenmaier. 2013. Framing image description as a ranking task: Data, models and evaluation metrics. *Journal of Artificial Intelligence Research*, 47:853–899.
- Sergio Jimenez, George Duenas, Julia Baquero, Alexander Gelbukh, Av Juan Dios Bátiz, and Av Mendizábal. 2014. UNAL-NLP: Combining soft cardinality features for semantic textual similarity, relatedness and entailment. In *In SemEval*, pages 732–742.
- Diederik Kingma and Jimmy Ba. 2015. Adam: A method for stochastic optimization. In *ICLR*.
- Alice Lai and Julia Hockenmaier. 2014. Illinois-LH: A denotational and distributional approach to semantics. *Proc. SemEval*, 2:5.
- Chin-Yew Lin. 2004. ROUGE: A package for automatic evaluation of summaries. In *Text Summarization Branches Out: Proceedings of the ACL-04 workshop*, volume 8.

- Chia-Wei Liu, Ryan Lowe, Iulian V Serban, Michael Noseworthy, Laurent Charlin, and Joelle Pineau. 2016a. How not to evaluate your dialogue system: An empirical study of unsupervised evaluation metrics for dialogue response generation. In *EMNLP*.
- Siqi Liu, Zhenhai Zhu, Ning Ye, Sergio Guadarrama, and Kevin Murphy. 2016b. Improved image captioning via policy gradient optimization of SPIDER. *arXiv preprint arXiv:1612.00370*.
- Eric W Noreen. 1989. *Computer-intensive methods for testing hypotheses*. Wiley New York.
- Pingbo Pan, Zhongwen Xu, Yi Yang, Fei Wu, and Yuet-ing Zhuang. 2016a. Hierarchical recurrent neural encoder for video representation with application to captioning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 1029–1038.
- Yingwei Pan, Tao Mei, Ting Yao, Houqiang Li, and Yong Rui. 2016b. Jointly modeling embedding and translation to bridge video and language. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 4594–4602.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. BLEU: a method for automatic evaluation of machine translation. In *ACL*, pages 311–318.
- Ankur P Parikh, Oscar Täckström, Dipanjan Das, and Jakob Uszkoreit. 2016. A decomposable attention model for natural language inference. In *EMNLP*.
- Ramakanth Pasunuru and Mohit Bansal. 2017. Multi-task video captioning with video and entailment generation. In *Proceedings of ACL*.
- Romain Paulus, Caiming Xiong, and Richard Socher. 2017. A deep reinforced model for abstractive summarization. *arXiv preprint arXiv:1705.04304*.
- Marc’Aurelio Ranzato, Sumit Chopra, Michael Auli, and Wojciech Zaremba. 2016. Sequence level training with recurrent neural networks. In *ICLR*.
- Steven J Rennie, Etienne Marcheret, Youssef Mroueh, Jarret Ross, and Vaibhava Goel. 2016. Self-critical sequence training for image captioning. *arXiv preprint arXiv:1612.00563*.
- Tim Rocktäschel, Edward Grefenstette, Karl Moritz Hermann, Tomáš Kočiský, and Phil Blunsom. 2016. Reasoning about entailment with neural attention. In *ICLR*.
- Christian Szegedy, Sergey Ioffe, and Vincent Vanhoucke. 2016. Inception-v4, inception-resnet and the impact of residual connections on learning. In *CoRR*.
- Ramakrishna Vedantam, C Lawrence Zitnick, and Devi Parikh. 2015. CIDER: Consensus-based image description evaluation. In *CVPR*, pages 4566–4575.
- Subhashini Venugopalan, Lisa Anne Hendricks, Raymond Mooney, and Kate Saenko. 2016. Improving lstm-based video description with linguistic knowledge mined from text. In *EMNLP*.
- Subhashini Venugopalan, Marcus Rohrbach, Jeffrey Donahue, Raymond Mooney, Trevor Darrell, and Kate Saenko. 2015a. Sequence to sequence-video to text. In *CVPR*, pages 4534–4542.
- Subhashini Venugopalan, Huijuan Xu, Jeff Donahue, Marcus Rohrbach, Raymond Mooney, and Kate Saenko. 2015b. Translating videos to natural language using deep recurrent neural networks. In *NAACL HLT*.
- Adina Williams, Nikita Nangia, and Samuel R Bowman. 2017. A broad-coverage challenge corpus for sentence understanding through inference. *arXiv preprint arXiv:1704.05426*.
- Ronald J Williams. 1992. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine learning*, 8(3-4):229–256.
- Yonghui Wu, Mike Schuster, Zhifeng Chen, Quoc V Le, Mohammad Norouzi, Wolfgang Macherey, Maxim Krikun, Yuan Cao, Qin Gao, Klaus Macherey, et al. 2016. Google’s neural machine translation system: Bridging the gap between human and machine translation. *arXiv preprint arXiv:1609.08144*.
- Jun Xu, Tao Mei, Ting Yao, and Yong Rui. 2016. MSR-VTT: A large video description dataset for bridging video and language. In *CVPR*, pages 5288–5296.
- Li Yao, Atousa Torabi, Kyunghyun Cho, Nicolas Balas, Christopher Pal, Hugo Larochelle, and Aaron Courville. 2015. Describing videos by exploiting temporal structure. In *CVPR*, pages 4507–4515.
- Wojciech Zaremba and Ilya Sutskever. 2015. Reinforcement learning neural turing machines. *arXiv preprint arXiv:1505.00521*, 362.
- Wojciech Zaremba, Ilya Sutskever, and Oriol Vinyals. 2014. Recurrent neural network regularization. *arXiv preprint arXiv:1409.2329*.